

Ring / Multidrop Fibre Converter RS-232

ODW-720-F2

- ⌘ Numerous fibre configuration options
 - Up to 120 km distance
 - BiDi support (single fibre)
 - Multimode and singlemode SFPs in single ring
- ⌘ Designed for use in industrial applications
 - Dual 10 V to 60 VDC power input
 - 500,000h MTBF according to MIL HDBK-217K
 - Compact housing with integral DIN rail clip
- ⌘ Unique solutions for serial RS-232 protocols
 - Data rates to 250 kbit/s and up to 12 data bits
 - Dual channel for data or status
 - Half- and full duplex bus mode (Y/V mode)
- ⌘ Extensive resilient fibre optic network solutions
 - Ring recovery < 1 ms
 - Latency < 0.5 ms allowing 250 units per ring
 - Galvanically isolated fault status output



EN 61000-6-2
Industrial Immunity

EN 61000-6-3
Residential Emission

EN 61000-6-4
Industrial Emission

EN 50121-4
Railway Trackside

The ODW-720-F2 has been designed to allow the use of fibre optic cables on RS-232 networks. The design allows the use of a range of Westermo verified SFP (Small Form Pluggable) transceivers which can provide solutions with, for example, only a single fibre or distances up to 120 km. Both multidrop networks and redundant rings can be formed using a mixture of transceiver types.

This unit has been designed for industrial use where the requirement is for a long and reliable service life, in a harsh environment. To ensure this reliable operation we manufacture using the highest quality components.

The ODW-720 draws on Westermo's many years of knowledge of serial protocols and can even transmit a second data channel if necessary.


Large ring networks can be created to provide network resilience to guarantee system functionality, even if a cable is damaged. The ring recovery time ensures that the network devices are not aware of the failure. The fault contact provides a method to communicate network failures.

Ordering Information

Art.no	Description
3651-0722	ODW-720-F2
3125-0001	PS-30, Power supply, DIN mounted (Accessories)

Specifications ODW-720-F2

Dimensional drawing

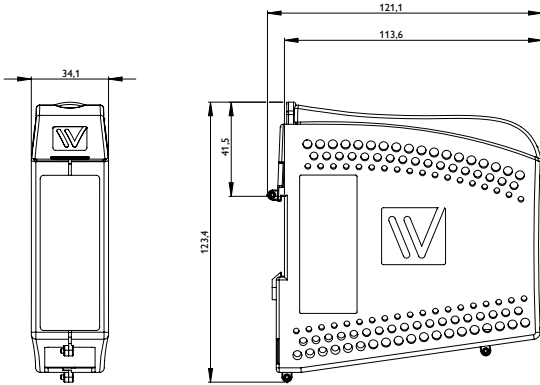

Dimension W x H x D 35 x 121 x 119 mm (1.37 x 4.76 x 4.68 in)
 Weight 0.26 kg
 Degree of protection IP 21

Power	
Operating voltage	10 to 60 VDC and 20 to 30 VAC
Rated current	400 mA @ 12 V 200 mA @ 24 V 100 mA @ 48 V

Interfaces	
Status	1 x Detachable screw terminal
RS-422/485	1 x 300 bit/s – 1.5 Mbit/s
FX (Fibre)	2 x LC Duplex or LC Simplex

Temperature	
Operating	-40 to +60°C (-40 to +140°F)
Storage & Transport	-40 to +60°C (-40 to +140°F)

Agency approvals and standards compliance	
EMC	EN 61000-6-1, Immunity residential environments
	EN 61000-6-2, Immunity industrial environments
	EN 61000-6-3, Emission residential environments
	EN 61000-6-4, Emission industrial environments
	EN 55022, Emission IT equipment, class A
	EN 55024, Immunity IT equipment
	FCC part 15 Class A
	EN 50121-4, Railway signalling and telecommunications apparatus
Safety	IEC 62236-4, Railway signalling and telecommunications apparatus
	UL/CSA/IEC/EN 60950-1, IT equipment